

PORTACOOOL HAZARDOUS LOCATION™

EXTRAORDINARY COOLING FOR CHALLENGING ENVIRONMENTS




FEATURES

- Spark resistant
- Molded in handles
- Liquid Level Indicator
- One piece housing
- Dual water fill
- Extra large drain
- All electrical components are sealed making them intrinsically safe



**ETL HAZARDOUS LOCATION,
CLASS 1, DIVISION 2,
GROUP C & D CERTIFIED**

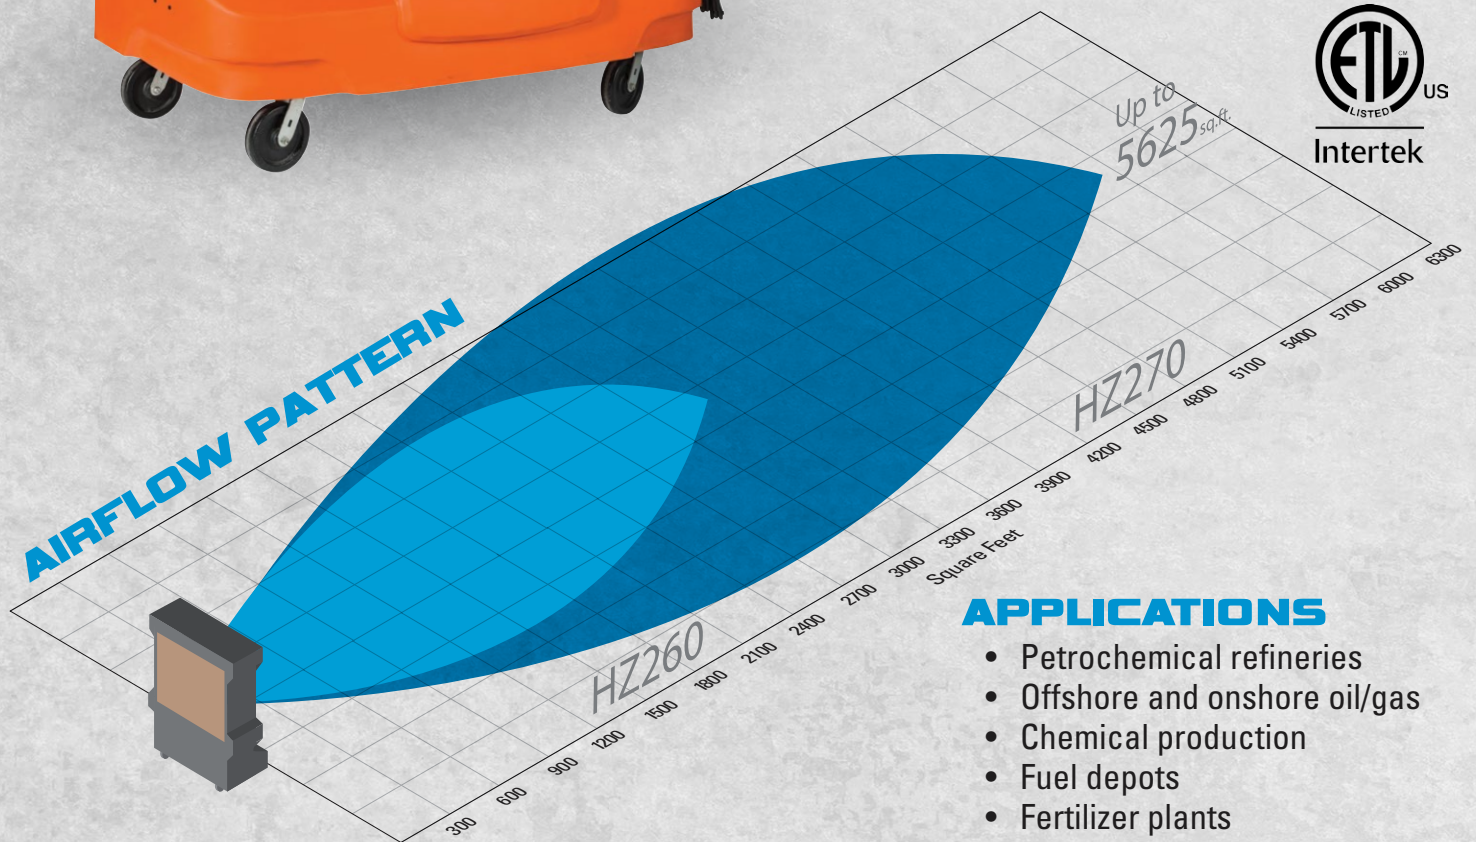

APPLICATIONS

- Petrochemical refineries
- Offshore and onshore oil/gas
- Chemical production
- Fuel depots
- Fertilizer plants

HAZARDOUS SERIES



HAZARDOUS 270

Air delivery	22,500 CFM / 38,228 m ³ /hr
Velocity	20 mph / 32 kph
Amps	19.8
Speeds	One
Cooling capacity	5,625 s.f. / 523 m ²
Water reservoir	65 G / 246 L
Dimensions (inches)	90 H x 77 W x 35 D
Dimensions (cm)	229 H x 196 W x 89 D
Weight	357 lb / 162 kg
Decibel level	High - 80 / Low - 58
Stock number	PACHZ270*
Kuul Effect	38

*Standard 115v; Available in 220v

HAZARDOUS 260

Air delivery	12,500 CFM / 21,238 m ³ /hr
Velocity	18 mph / 29 kph
Amps	14.8
Speeds	One
Cooling capacity	3,125 s.f. / 290 m ²
Water reservoir	45 G / 170 L
Dimensions (inches)	78 H x 63 W x 29 D
Dimensions (cm)	198 H x 160 W x 74 D
Weight	302 lb / 137 kg
Decibel level	High - 78 / Low - 65
Stock number	PACHZ260*
Kuul Effect	25



*Standard 115v; Available in 220v

