

General Characteristics of ACU Series Standard Industrial Maximum Duty Circulators

The ACU Series air circulators are used for both commercial and industrial use.

For indoor or outdoor use.

The guards are hinged for easy access.

The blades are steel hub/spider aluminum paddle blades.

Comes with coated steel guards.

The pedestal base has an option of a wheel kit.

There are four different mounting types, ceiling mount, I-beam mount, wall mount and suspension mount.

Pedestal steel dome base is 27" in diameter and has 5 carriage bolts.

Pedestal pole adjusts in the center of the fan from 48" to 67" inches.

Accessories: there are 3 choices in extension cords.

6', 9' + 12'. These are used with drop down power switches.


12' safety cable and clamps. Plus drop down remote switches.

All accessories are quoted separately.

Note: Oscillating motors can only be mounted, where the motor can be mounted in the upright position.

Meets OSHA standards and are ETL-CETL listed.

Made in the U.S.A. with domestic and foreign components.

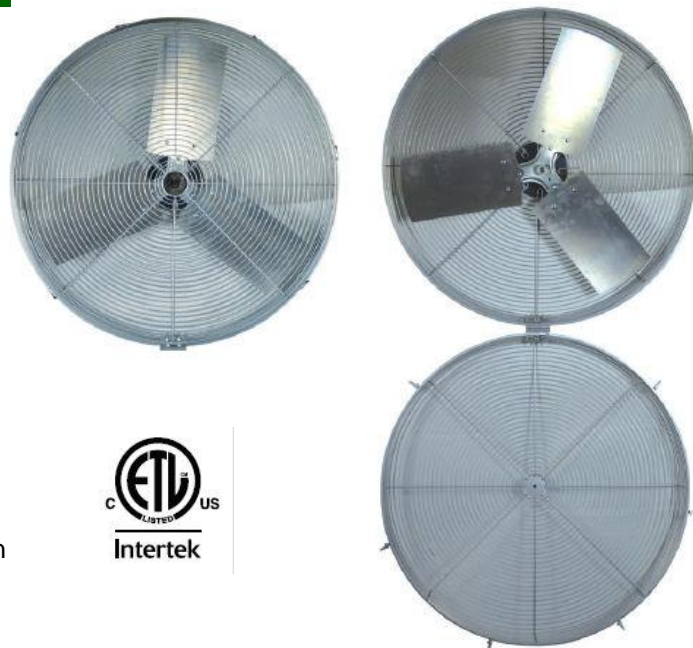

Product Applications of ACU Series Standard Industrial Maximum Duty Circulators

Used for both industrial and commercial use.

It is used to cool offices, factories, shops, bakeries, laundries, gymnasiums, warehouses, and virtually any place where ventilation is needed with a limited amount of space.

Warranty of ACU Series Standard Industrial Maximum Duty Circulators

Manufacturer's Limited Warranty: 1 year


Specific Characteristics of ACU Series Standard Industrial Maximum Duty Circulators

Item #	Manufacturing #	Blade Ø(In.)	CFM		Volts V	Amperes A	Phases PH	HP	RPM		Speed	Mount Type	Wheel Kit Option	Color	Weight and Dimensions with Packaging	
			High	Low					High	Low					Lbs.	L,W,H In.
			USCVT-001	ACU 24-PJR					24	4500					3600	120
USCVT-002	ACU 24-PJR + ACM-WK	24	4500	3600	120	2.5	1	1/4	1100	800	2	Pedestal	Wheels	Gray	81	16,29,29
USCVT-003	ACU 24-WJR	24	4500	3600	120	2.5	1	1/4	1100	800	2	Wall	-	Gray	47	16,29,29
USCVT-004	ACU 24IJR	24	4500	3600	120	2.5	1	1/4	1100	800	2	I-Beam	-	Gray	52	16,29,29
USCVT-005	ACU 24-CJR	24	4500	3600	120	2.5	1	1/4	1100	800	2	Ceiling	-	Gray	47	16,29,29
USCVT-006	ACU 24 24-SJR	24	4500	3600	120	2.5	1	1/4	1100	800	2	Suspension	-	Gray	45	16,29,29
USCVT-007	ACU 30-PJR	30	5400	4300	120	2.7	1	1/4	1100	800	2	Pedestal	-	Gray	80	16,35,35
USCVT-008	ACU 30-PJR + ACM-WK	30	5400	4300	120	2.7	1	1/4	1100	800	2	Pedestal	Wheels	Gray	84	16,35,35
USCVT-009	ACU 30WJR	30	5400	4300	120	2.7	1	1/4	1100	800	2	Wall	-	Gray	50	16,35,35


Item #	Manufacturing #	Blade Ø(In.)	CFM		Volts V	Amperes A	Phases PH	HP	RPM		Speed	Mount Type	Wheel Kit Option	Color	Weight and Dimensions with Packaging	
			High	Low					High	Low					Lbs.	L,W,H In.
USCVT-010	ACU 30-IJR	30	5400	4300	120	2.7	1	1/4	1100	800	2	I-Beam	-	Gray	80	16,35,35
USCVT-011	ACU 30-CJR	30	5400	4300	120	2.7	1	1/4	1100	800	2	Ceiling	-	Gray	84	16,35,35
USCVT-012	ACU 30-SJR	30	5400	4300	120	2.7	1	1/4	1100	800	2	Suspended	-	Gray	50	16,35,35

Dimensions (In.) of ACU Series Standard Industrial Maximum Duty Circulators

Series	Length A	Width B	Height C
USCVT-001 to 006	14.5"	27"	27"
USCVT-007 to 012	14.5"	33.5"	33.5"

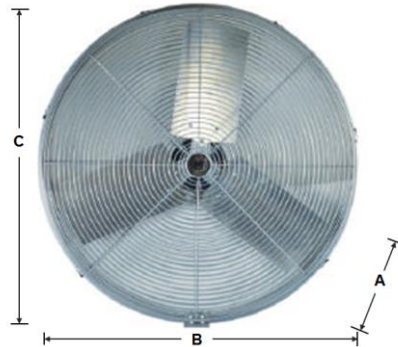

Mounting Options of ACU Series Standard Industrial Maximum Duty Circulators





Short Description of ACU Series Standard Industrial Maximum Duty Circulators

Item #	Manufacturing #	Short Description 70 Characters Maximum
		0123456789012345678901234567890123456789012345678901234567890123456789
USCVT-001	ACU 24-PJR	24", 4500CFM, 120V, 2.16A, 1PH, 1/4HP, 1100RPM, 2Spd, Pedestal, Gray.

SEO Table of ACU Series Standard Industrial Maximum Duty Circulators

Title
TPI ACU Series Standard Industrial Maximum Duty Circulators.
Meta Description
TPI ACU Series Standard Industrial Maximum Duty Circulators for Industrial Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Commercial use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Indoor Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Outdoor Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Cooling Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Ventilation Use.
Meta Key Words
TPI ACU Series Standard Industrial Maximum Duty Circulators for Industrial Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Commercial use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Indoor Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Outdoor Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Cooling Use, TPI ACU Series Standard Industrial Maximum Duty Circulators for Ventilation Use.
Meta URL (file name)
Tpi-acu-series-standard-industrial-maximum-duty-circulators-us-english.htm

Product Line Description of ACU Series Standard Industrial Maximum Duty Circulators

```
<FONT Size=1>
<b>Type:</b> TPI ACU Series Standard Industrial Maximum Duty Circulators<br>
<b>Motor Type:</b> Totally Enclosed<br>
<b>Manufacturer:</b> TPI<br>
<b>Model Series:</b> ACU Series<br>
<b>Voltage:</b> 120V<br>
<b>Horse Power:</b> 1/4Hp<br>
<b>Diameter:</b> 24" & 30"<br>
<b>Air Flow:</b> 5400 to 3600CFM<br>
<b>Speed:</b> 2<br>
<b>Mounting Type:</b> Pedestal, Pedestal with Wheels, Wall, I-Beam, Ceiling & Suspension<br>
<b>Color:</b> Gray<br>
<b>Ship By:</b> Free LTL Freight<br>
</FONT>
```