

General Characteristics

- ▶ The VentDepot BarnBelt has an all galvanized construction for corrosion resistance in harsh atmospheres.
- ▶ Comes with a welded 1" x 2" wire guard on intake and exhaust.
- ▶ Arrives assembled, ready to install
- ▶ It includes patented automatic belt tensioning
- ▶ Increases belt life and eliminated maintenance
- ▶ Steady belt pressure prevents belt slippage and increases motor efficiency
- ▶ Allows belt changes without the use of tools

Product Applications

- ▶ These fans work superbly in Poultry Houses, Dairy Barns, and Greenhouses.
- ▶ These fans remove excess heat, unwanted odors, and help keep a suitable living area for animals and plants.

Warranty

- ▶ Manufacturer's Limited Warranty: 3 Years.




VentDepot.com

Specific Characteristics

Item #	Ø (in)	CFM @ SP H ₂ O in.			Num. of Blades	RPM @ 0" SP	A		Phase	HP	Drive Type	Motor Enclosure	Shipping Weight and Size	
		00"	.05"	.10"			115V	230V					lbs	(L,W,H) (in)
USBRB-001	36	10380	9260	8670	4	550	7.6	3.8	1	1/2	Belt	Totally Enclosed	140	44,44,23
USBRB-002	42	13640	12490	11220	4	499	7.6	3.8	1	1/2	Belt	Totally Enclosed	165	50,50,23
USBRB-003	48	19400	17500	15700	4	475	11	5.5	1	1	Belt	Totally Enclosed	193	56,56,23
USBRB-004	54	23800	22000	19800	4	450	11	5.5	1	1	Belt	Totally Enclosed	237	64,64,23
USBRB-005	36	11010	10450	9820	6	560	7.6	3.8	1	1/2	Belt	Totally Enclosed	152	44,44,23
USBRB-006	42	13680	12660	11590	6	494	7.6	3.8	1	1/2	Belt	Totally Enclosed	177	50,50,23
USBRB-007	48	21100	19900	18700	6	482	11	5.5	1	1	Belt	Totally Enclosed	210	56,56,23
USBRB-008	54	23400	21900	20400	6	419	11	5.5	1	1	Belt	Totally Enclosed	242	64,64,23

Dimensions (in)

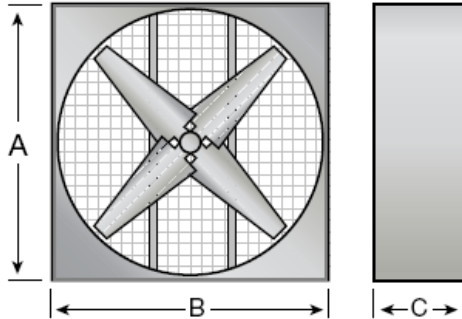

Item #	Ø	A	B	C
USBRB-001	36	40 ¾	40 ¾	20
USBRB-002	42	46 ¾	46 ¾	20
USBRB-003	48	52 ¾	52 ¾	20
USBRB-004	54	60 ¾	60 ¾	20
USBRB-005	36	40 ¾	40 ¾	20
USBRB-006	42	46 ¾	46 ¾	20
USBRB-007	48	52 ¾	52 ¾	20
USBRB-008	54	60 ¾	60 ¾	20

CFM/Watt

Item #	.00" SP		.05" SP		.10" SP	
	CFM	CFM / Watt	CFM	CFM / Watt	CFM	CFM / Watt
USBRB-001	10,380	18.5	9,260	16.6	8,670	14.6
USBRB-002	13,640	20.9	12,490	18.2	11,220	15.6
USBRB-003	19,400	21.0	17,500	18.4	15,700	15.9
USBRB-004	23,800	22.6	22,000	20.1	19,800	17.6
USBRB-005	11,010	16.0	10,450	14.6	9,820	13.3
USBRB-006	13,680	20.4	12,660	17.7	11,590	15.2
USBRB-007	21,100	18.0	19,900	16.7	18,700	15.4
USBRB-008	23,400	22.8	21,900	20.5	20,400	18.4