




**CE Guard Mounted  
 Direct Drive Exhaust Fans**  
 Data sheet

**General Characteristics of CE Guard Mounted Direct Drive Exhaust Fans**

The CE guard mounted exhaust fan is perfect for economical installations.  
 Used for industrial and commercial environments.  
 For indoor and outdoor use.  
 For outdoor use protection may be needed from the elements.  
 Bolts directly to wall and can be used with or without external shutter.  
 Comes with pull chain switch.  
 No cord - junction box provided for direct wiring.  
 Made with aluminum blades and steel spiral wire guards.  
 Note: rough-in hole size is 1/2" inch larger than fan blade size.  
 Motor Specs:  
 120V, 1-phase, totally enclosed & permanently lubricated.  
 1/12 HP motor is 3-speed sleeve bearing permanent split capacitor.  
 1/8 HP motor is 3-speed sleeve bearing permanent split capacitor.  
 1/4 HP motor is 2-speed ball bearing permanent split capacitor.  
 Made in the U.S.A. with domestic and foreign components.

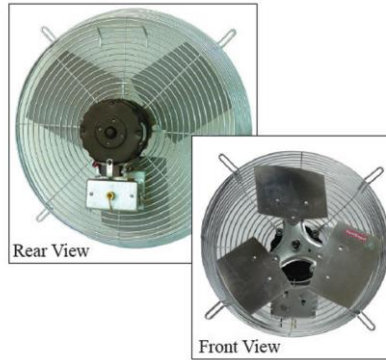

**Product Applications of CE Guard Mounted Direct Drive Exhaust Fans**

Industrial and commercial use: Gymnasiums, offices, workshops, Warehouse, and more.  
 For ventilation, exhaust and cooling use.  
 For indoor and outdoor use, for outdoor use protection may be needed from the elements.

**Warranty of CE Guard Mounted Direct Drive Exhaust Fans**

Manufacturer's Limited Warranty: 1 Year.

**Specific Characteristics of CE Guard Mounted Direct Drive Exhaust Fans**

Item #	Manufacturing #	Blade Dia. (In.)	CFM/RPM			Volts V	Amperes A	Phase Ph	HP	Speed	Shutter Option	Weight and Dimensions with Packaging	
			High	Med.	Low							Lbs.	L,W,H In.
USOFN-001	CE 10-D	10	680/1560	540/1250	460/1080	120	1	1	1/12	3	-	13	7,16,16
USOFN-002	CE 10-D + CES-10G	10	680/1560	540/1250	460/1080	120	1	1	1/12	3	Shutter	20	7,16,16
USOFN-003	CE 12-D	12	825/1560	710/1250	560/1080	120	1.1	1	1/12	3	-	14	9,18,18
USOFN-004	CE 12-D + CES-12G	12	825/1560	710/1250	560/1080	120	1.1	1	1/12	3	Shutter	19	9,18,18
USOFN-005	CE 14-D	14	1520/1660	1400/1550	1250/1370	120	2	1	1/8	3	-	19	9,20,20
USOFN-006	CE 14-D + CES-14G	14	1520/1660	1400/1550	1250/1370	120	2	1	1/8	3	Shutter	25	9,20,20
USOFN-007	CE 16-D	16	2100/1660	1900/1550	1700/1370	120	2.1	1	1/8	3	-	20	9,22,22
USOFN-008	CE 16-D + CES-16G	16	2100/1660	1900/1550	1700/1370	120	2.1	1	1/8	3	Shutter	28	9,22,22
USOFN-009	CE 18-D	18	2300/1660	2100/1050	1850/1370	120	2.2	1	1/8	3	-	21	9,24,24
USOFN-010	CE 18-D + CES-18G	18	2300/1660	2100/1050	1850/1370	120	2.2	1	1/8	3	Shutter	30	9,24,24
USOFN-011	CE 20-D	20	2925/1140	-	2380/1070	120	2.3	1	1/4	2	-	36	9,27,27
USOFN-012	CE 20-D + CES-20G	20	2925/1140	-	2380/1070	120	2.3	1	1/4	2	-	46	9,27,27
USOFN-013	CE 24-D	24	3400/1140	-	2770/1070	120	2.5	1	1/4	2	Shutter	40	9,31,31
USOFN-014	CE 24-D + CES-24G	24	3400/1140	-	2770/1070	120	2.5	1	1/4	2	-	53	9,31,31
USOFN-015	CE 30-D	30	3950/1140	-	3080/1070	120	2.7	1	1/4	2	Shutter	44	9,36,36
USOFN-016	CE 30-D + CES-30G	30	3950/1140	-	3080/1070	120	2.7	1	1/4	2	-	63	9,36,36

Commented [TD1]: |



**CE Guard Mounted  
 Direct Drive Exhaust Fans**  
 Data sheet

Dimensions (In.) of CE Guard Mounted Direct Drive Exhaust Fans			
Series	Length A	Width B	Height C
USOFN-001 & 002	5.81"	14.14"	14.14"
USOFN-003 & 004	7.18"	16.46"	16.46"
USOFN-005 & 006	7.18"	18.30"	18.30"
USOFN-007 & 008	7.18"	20.34"	20.34"
USOFN-009 & 010	7.18"	22.64"	22.64"
USOFN-011 & 012	7.18"	25.46"	25.46"
USOFN-013 & 014	7.18"	29.08"	29.08"
USOFN-015 & 016	7.18"	34.89"	34.89"

