

### General Characteristics

- ▶ The exhaust ExoBox fans are ruggedly designed for continuous operation in anywhere air movement is required to control condensation and reduce stagnate air.
- ▶ The fan frame is manufactured from heavy gauge galvanized steel to reduce rust and corrosion.
- ▶ The built-in shutter opens automatically when the fan is turned on and closes when the fan is turned off.
- ▶ Easy installation is the term most associated with the ExoBox. Simply cut a square opening in the wall, the size shown below for housing dimension "B", PLUS 1/4".
- ▶ Last, connect motor to a 115 volt, 60 Hertz, single phase power source and your fan is ready to exhaust your building.

### Product Applications

- ▶ For Industrial, Commercial, and Home use for continuous operation in workshops, barns, poultry houses, greenhouses, garages or in anywhere air movement is required

### Warranty

- ▶ Manufacturer's Limited Warranty: 1 Year in the USA.




VentDepot.com

### Specific Characteristics

Item #	Ø in.	CFM	RPM	Voltage	Amp	HP	Drive Type	Motor Enclosure	Shipping Weight and Dimensions	
									Weight lbs	Size in. L,W,H
<b>USEBX-001</b>	12	1580	1625	115	2.2	1/6	Direct	Totally Enclosed	35	19,14,19
<b>USEBX-002</b>	16	2600	1650	115	2.3	1/4	Direct	Totally Enclosed	43	24,14,23
<b>USEBX-003</b>	20	3200	1650	115	2.3	1/4	Direct	Totally Enclosed	55	28,14,27
<b>USEBX-004</b>	24	5460	1100	115	6.1	1/2	Direct	Totally Enclosed	66	32,16,31
<b>USEBX-005</b>	30	6800	1100	115	6.1	1/2	Direct	Totally Enclosed	70	40,16,40

### Dimensions (in)

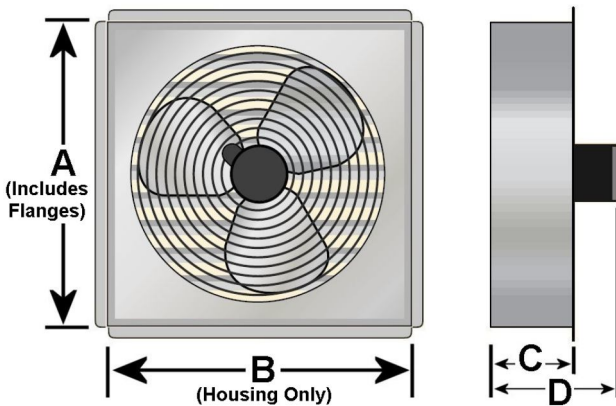

Item #	Triangle Model	A	B Cut Square + 1/4" for Installation	C	D
<b>USEBX-001</b>	GPX 1210	18 3/4"	17 1/8"	6"	13 1/4"
<b>USEBX-002</b>	GPX 1611	22 3/4"	21 1/8"	6"	13"
<b>USEBX-003</b>	GPX 2011	26 3/4"	25 1/8"	6"	13"
<b>USEBX-004</b>	GPX 2413	30 3/4"	29 1/8"	6"	14 1/4"
<b>USEBX-005</b>	GPX 3013	36 3/4"	35 1/8"	6"	14 1/4"