


General Characteristics of HDH Series Industrial Maximum Duty Circulators

The HDH Series is an air circulator with pedestal, wall mount, I-Beam mount, ceiling mount and wheel options. Has easy access hinged guards for maintenance purposes. Is used in industrial and commercial environments. Used for indoor and outdoor use, for cooling and high volume air movement. In the case of outdoor use, they must have protection against the elements. Steel hub/spider aluminum paddle blades, plus powder coated steel guards. Switch: pull chain. Cord Options (ordered separately): 6', 9' & 12' extension cord used with drop down power switch. Motor Specifications: 2-speed, 1/2HP, 1 phase, 120V, ball bearing style, totally enclosed, permanently lubricated, permanent split capacitor, 1/2 shaft with a frame size of 48". Pedestal Specifications: pedestal pole adjusts in the center of the fan from 48 to 67 inches and pedestal steel dome base is 27" in diameter and has 5 carriage bolts. Meets OSHA standards and is ETL-CETL listed. Also made in the U.S.A. with domestic and foreign components.

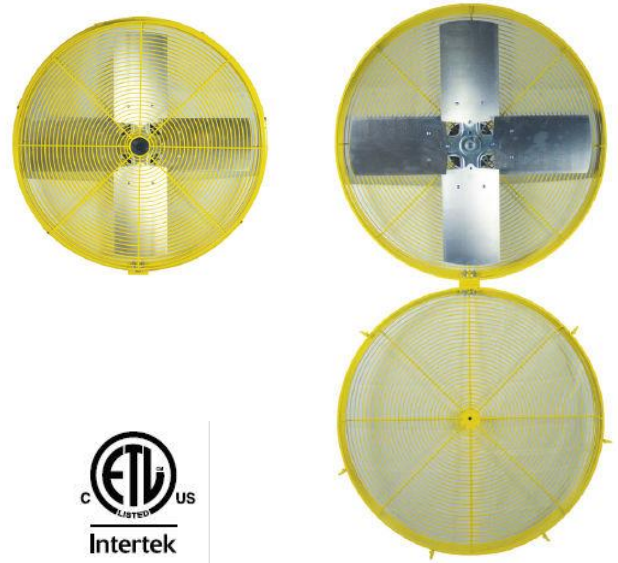

Product Applications of HDH Series Industrial Maximum Duty Circulators

For industrial and commercial use. Good for indoor and outdoor use, in the case of outdoor use, protection may be need from the elements. It is used to cool factories, shops, bakeries, loading docks, laundries, gymnasiums, warehouses, aircraft hangars, and virtually any place a high volume of air movement is required.

Warranty of HDH Series Industrial Maximum Duty Circulators

Manufacturer's Limited Warranty: 5 Years.

Specific characteristics of HDH Series Industrial Maximum Duty Circulators


Item #	Manufacturing #	Size Ø(In.)	CFM		Volts V	Amperes A	Phases Ph	HP	RPM		Speed	Color	Mounting Type	Weight and Dimensions with Packaging	
			High	Low					High	Low				Lbs.	L,W,H In.
			USLFA-001	HDH 24-JR					24	5600					
USLFA-002	HDH 24-JR + HDM-P	24	5600	4500	120	3.5	1	1/2	1100	800	2	Yellow	Pedestal	80	16,29,29
USLFA-003	HDH 24-JR + HDM-P + ACM-WK	24	5600	4500	120	3.5	1	1/2	1100	800	2	Yellow	Wheels	86	16,29,29
USLFA-004	HDH 24-JR + HDM-C	24	5600	4500	120	3.5	1	1/2	1100	800	2	Yellow	Ceiling	49	16,29,29
USLFA-005	HDH 24-JR + HDM-I	24	5600	4500	120	3.5	1	1/2	1100	800	2	Yellow	I-Beam	55	16,29,29
USLFA-006	HDH 24-JR + HDM-W	24	5600	4500	120	3.5	1	1/2	1100	800	2	Yellow	Wall	49	16,29,29
USLFA-007	HDH 30-JR	24	6800	5400	120	4	1	1/2	1100	800	2	Yellow	-	48	16,35,35
USLFA-008	HDH 30-JR + HDM-P	24	6800	5400	120	4	1	1/2	1100	800	2	Yellow	Pedestal	84	16,35,35



Item #	Manufacturing #	Size Ø(In.)	CFM		Volts V	Amperes A	Phases Ph	HP	RPM		Speed	Color	Mounting Type	Weight and Dimensions with Packaging	
			High	Low					High	Low				Lbs.	L,W,H In.
USLFA-009	HDH 30-JR + HDM-P + ACM-WK	30	6800	5400	120	4	1	1/2	1100	800	2	Yellow	Wheels	88	16,35,35
USLFA-010	HDH 30-JR + HDM-C	30	6800	5400	120	4	1	1/2	1100	800	2	Yellow	Ceiling	53	16,35,35
USLFA-011	HDH 30-JR + HDM-I	30	6800	5400	120	4	1	1/2	1100	800	2	Yellow	I-Beam	59	16,35,35
USLFA-012	HDH 30-JR + HDM-W	30	6800	5400	120	4	1	1/2	1100	800	2	Yellow	Wall	53	16,35,35
USLFA-013	HDH 24-GJR	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	-	44	16,29,29
USLFA-014	HDH 24-GJR + ACM-P	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	Pedestal	80	16,29,29
USLFA-015	HDH 24-GJR + ACM-P + ACM-WK	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	Wheels	86	16,29,29
USLFA-016	HDH 24-GJR + ACM-C	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	Ceiling	49	16,29,29
USLFA-017	HDH 24-GJR + ACM-I	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	I-Beam	55	16,29,29
USLFA-018	HDH 24-GJR + ACM-W	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	Wall	49	16,29,29
USLFA-019	HDH 24-GJR + ACM-S	24	5600	4500	120	3.5	1	1/2	1100	800	2	Gray	Suspension	48	16,29,29
USLFA-020	HDH 30-GJR	30	5600	4500	120	4	1	1/2	1100	800	2	Gray	-	48	16,35,35
USLFA-021	HDH 30-GJR + ACM-P	30	6800	5400	120	4	1	1/2	1100	800	2	Gray	Pedestal	84	16,35,35
USLFA-022	HDH 30-GJR + ACM-P + ACM-WK	30	6800	5400	120	4	1	1/2	1100	800	2	Gray	Wheels	88	16,35,35
USLFA-023	HDH 30-GJR + ACM-C	30	6800	5400	120	4	1	1/2	1100	800	2	Gray	Ceiling	53	16,35,35
USLFA-024	HDH 30-GJR + ACM-I	30	6800	5400	120	4	1	1/2	1100	800	2	Gray	I-Beam	59	16,35,35
USLFA-025	HDH 30-GJR + ACM-W	30	6800	5400	120	4	1	1/2	1100	800	2	Gray	Wall	53	16,35,35
USLFA-026	HDH 30-GJR + ACM-S	30	6800	5400	120	4	1	1/2	1100	800	2	Gray	Suspension	52	16,35,35


Dimensions (In.) of HDH Series Industrial Maximum Duty Circulators

Series	Length A	Width B	Height C
USLFA-001 to 006 & 013 to 019	14.5"	27"	27"
USLFA-007 to 012 & 020 to 026	14.5"	33.5"	33.5"

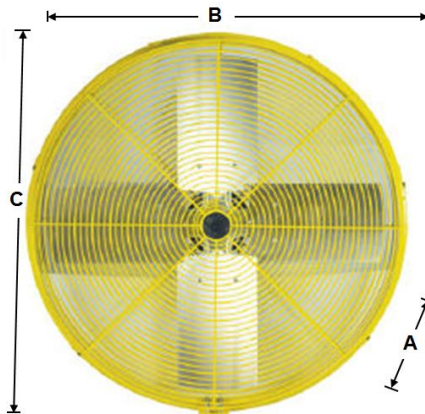



Mounting Options of HDH Series Industrial Maximum Duty Circulators

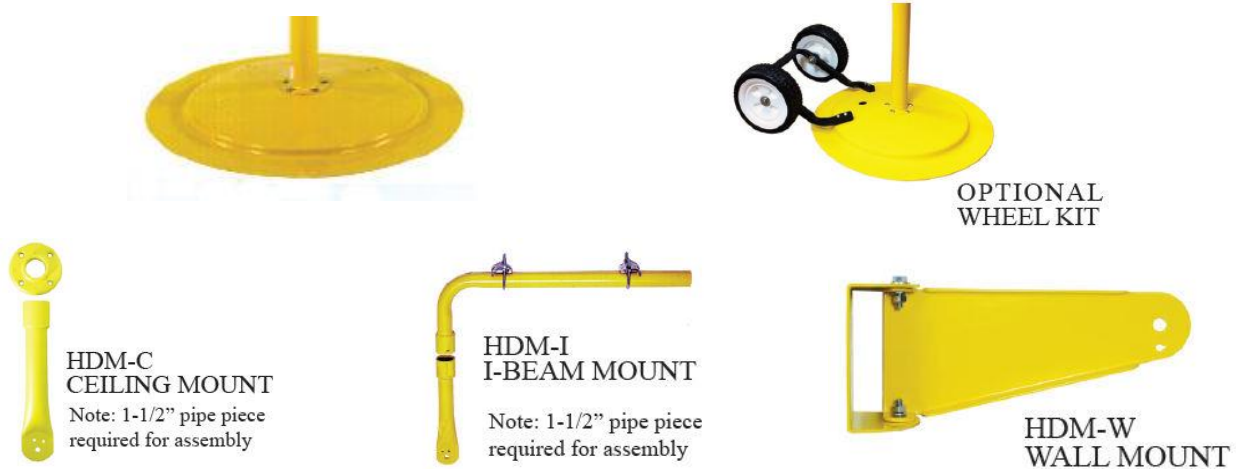

Short Description of HDH Series Industrial Maximum Duty Circulators

Item #	Manufacturing #	Short Description 70 Characters Maximum
USLFA-001	HDH 24-JR	CFMH/L5600/4500, RPMH/L1100/800, 1/2Hp, 2Spd, 3.5A, 120V, 1Ph, Yellow.

SEO Table of HDH Series Industrial Maximum Duty Circulators

Title
TPI HDH Series Industrial Maximum Duty Circulators.
Meta Description
TPI HDH Series Industrial Maximum Duty Circulators for Industrial Use, TPI HDH Series Industrial Maximum Duty Circulators for Commercial use, TPI HDH Series Industrial Maximum Duty Circulators for Indoor Use, TPI HDH Series Industrial Maximum Duty Circulators for Outdoor Use, TPI HDH Series Industrial Maximum Duty Circulators for Cooling Use, TPI HDH Series Industrial Maximum Duty Circulators for High Volume Air Movement Use.
Meta Key Words
TPI HDH Series Industrial Maximum Duty Circulators for Industrial Use, TPI HDH Series Industrial Maximum Duty Circulators for Commercial use, TPI HDH Series Industrial Maximum Duty Circulators for Indoor Use, TPI HDH Series Industrial Maximum Duty Circulators for Outdoor Use, TPI HDH Series Industrial Maximum Duty Circulators for Cooling Use, TPI HDH Series Industrial Maximum Duty Circulators for High Volume Air Movement Use.
Meta URL (file name)
Tpi-hdh-series-industrial-maximum-duty-circulators-us-english.htm

Product Line Description of HDH Series Industrial Maximum Duty Circulators

```

<FONT Size=1>
<b>Type:</b> TPI HDH Series Industrial Maximum Duty Circulators <br>
<b>Motor Type:</b> Totally Enclosed<br>
<b>Manufacturer:</b> TPI<br>
<b>Model Series:</b> HDH<br>
<b>Voltage:</b> 120V<br>
<b>Horse Power:</b> 1/2Hp<br>
<b>Diameters:</b> 24" & 30"<br>
<b>Air Flow:</b> 4500 to 6800CFM<br>
<b>Speed:</b> 2 Speed<br>
<b>Mounting Options:</b> Pedestal, Pedestal with Wheel Kit, Wall Mount, I-Beam Mount, Ceiling Mount or Suspension Mount<br>
<b>Color:</b> Yellow or Gray<br>
<b>Ship By:</b> Free LTL Freight<br>
</FONT>
    
```