

General Characteristics of KompactDry
KOMPACT Professional Dehumidifier

The Ebac KOMPACT Dehumidifier is a rugged, yet portable mobile piece of equipment that will operate under extreme conditions and pull large amounts of moisture from the air.

The KOMPACT **KEY DESIGN FEATURES** are:

- Washable Air filter for easy maintenance
 - Rugged wheels with shock absorbing semi-pneumatic tires
 - Collapsible Handle for easy transport
 - Internal condensate pump capable of a 20' water vertical lift
 - Hours Run Meter providing accurate run time measurements
 - High efficiency rotary compressor.
 - Extra-long power cord (16')
 - Extra-long drain hose (25')
- The Ebac KOMPACT unit has a unique "Hot Gas" defrosting feature which automatically melts away frost buildup providing effective operation at low ambient temperatures.
- Rugged, epoxy powder-coated steel chassis and housing.
- Simple operation with a standard 115V plug.

Product Applications of KompactDry
KOMPACT Professional Dehumidifier

The Ebac KOMPACT Professional Dehumidifier is the ideal unit for commercial and residential work. Its compact size permits one man operation, yet has the capacity to handle several room-size areas at a time. The small, compact size of the KOMPACT allows the unit to be easily moved and transported from job to job.

Warranty of Ebac KOMPACT Dehumidifier

The Ebac KOMPACT Dehumidifier has a 1 year limited manufacturer's warranty.




Technical Characteristics of Ebac KOMPACT Dehumidifier

Item #	Manufacturer #	Water Removal Capacity per 24 hours			Effective Volume		Volts V	Amps A	Phase Ph	Hertz Hz	Refrigerant	Watts W	dbs	Water Pump	Shipping Weight and Dimensions with Packaging	
		ppd Pints	Gallons	Liters	Cubic Feet	m ³									Lbs.	L,W,H In.



Dimensions of Ebac KOMPACT Dehumidifier

Item#	Manufacturer #	Size A	Size B	Size C
USKOD-001	KOMPACT	24"	19"	20"

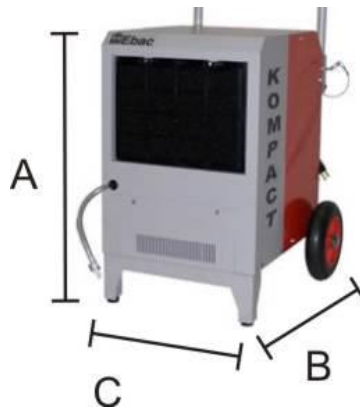

Product Specifications of Ebac KOMPACT Dehumidifier

SPECIFICATIONS	KOMPACT	FEATURES	KOMPACT
Model No.	10240KP-US	Model No.	10240KP-US
Height	24" (610mm)	On / Off Control	√
Width	20" (508mm)	Electronic Defrost Control	√
Depth	19" (483mm)	Compressor Type	Rotary
Weight	78 lbs (35kg)	Fitted Mains Plug	√
Voltage	110V	Semi-Pneumatic Shock Absorbing Tires	√
Phase	1	Integral Condensate Pump	√
Frequency	60 Hz	Pump Purge Switch	√
Current	7 A	Hours Run Meter	√
Power	880W	Hot Gas Defrost System	√
Airflow	360cfm (608m ³ /hr)	Washable Air Filter	√
Noise Level	57dba	Quick Release Hose Coupling	√
Refrigerant	R407c	Collapsible Carrying Handles	√
Effective Volume	8,369 cubic FT (237m ³)	25' Length of PVC Drain Hose	√
Typical Extraction	56 ppd	Epoxy Powder Coating	√
Minimum Operating Temperature	33°F (1°C)	Cable Wrap Facility	√
Maximum Operating Temperature	95°F (35°C)	Quiet Operation	√

Product Applications of Ebac KOMPACT Dehumidifier

APPLICATIONS	KOMPACT
MODEL NO.	10240KP-US
Flood & Restoration	√
Roof Leaks	√
Basements / Cellars	√
Laundries	√



KompactDry
KOMPACT Professional
Dehumidifier
Data Sheet

Vehicle Storage	√
Hotels / Guest Houses	√
Second Homes	√
Laboratories	√
Offices	√