

General Characteristics of DKL-INC Optional Modular Lights.

The dock light head housing mounts to an adjustable steel mounting frame; Includes on/off switch, protective grill and ships fully assembled. The SJT type 18/3 conductor cable is grounded and 14 inches long.

Does not include focus.

Chips-resistant yellow and black powder coated finish for high visibility and durability.

No bulb is provided, but the unit is approved to operate as a stand-alone fixture using a bulb rated up to 300 watts.

Plugs into embedded outlet in arm On/Off switch and wire guard included LED bulb included with DKLED-30W-SP Safety yellow finish for higher visibility

Product Applications of DKL-INC Optional Modular Lights.

It can be used in any area requiring directional lighting such as loading dock trailers, personal Workstation, shops, garages, comercial driving or industrial áreas.

Warranty of DKL-INC Optional Modular Lights.

Manufacturer's Warranty: 1-Year



Optional Modular Lights

Data Sheet




Specific Characteristics of DKL-INC Optional Modular Lights.								
Item #	Manufacturing #	Light Head Type	Max Watts	Max Lumens	Ave. Bulb Life (Hrs)	Color	Weight	and Dimensions with Packaging
					, ,		Lbs	L,W,H In.
USDKI -001	DKI -INC	Incandescent	300	3700	2000	Yellow/Black	5	13 10 10





DKL-INC Optional Modular Lights Data Sheet

	Data Officer						
Dimensions (In) of DKL-INC Optional Modular Lights							
Series	Width A	Heigth B	Depth C				
USDKL-001	12	9.5	8				
THE STATE OF THE S							

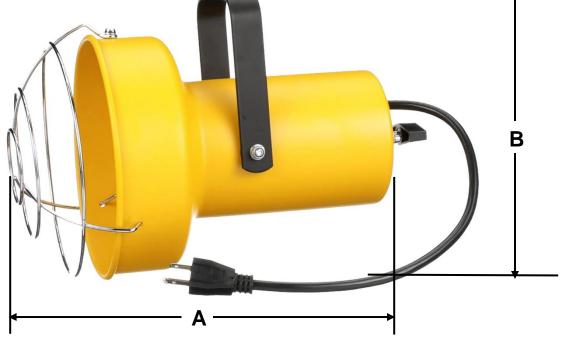







DKL-INC Optional Modular Lights Data Sheet



ID	Author	Description Error	Description Update	Supervisor Name
V1	Marcela Roldán	Technical Sheet Nueva	Technical Sheet Nueva	J.L.