



## BELT DRIVE SLW

- Rugged heavy gauge galvanized housing, frame and blade
- Galvanized welded bird screen on both front and back
- Rolled inlet venturi for efficient air flow
- Totally enclosed motors

### FOUR BLADE MODELS


Diameter	Model	Volts	HP	Amps	RPM	0.00" SP		0.05" SP		0.10" SP		Approximate Weight
						CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt	
36"	SLW 3613	230/1	1/2	3.8	550	10,718	16.9	9,952	14.9	9,022	13.1	195
48"	SLW 4815	230/1	1	5.5	475	20,089	19.0	18,959	17.6	17,473	15.8	260

### SIX BLADE MODELS

Diameter	Model	Volts	HP	Amps	RPM	0.00" SP		0.05" SP		0.10" SP		Approximate Weight
						CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt	
36"	SLW 36136	230/1	1/2	3.8	550	11,340	16.9	10,973	15.3	10,507	14.0	212
48"	SLW 48156	230/1	1	5.5	475	20,477	22.6	19,396	30.2	18,331	18.5	272

\*Performance data includes the effect of a shutter and discharge cone.

Dimensions					
Diameter	A	B	C	D	E
36"	42"	30"	40 1/2"	20 1/2"	40 1/2"
48"	54"	32"	52 1/2"	19 1/2"	52 1/2"

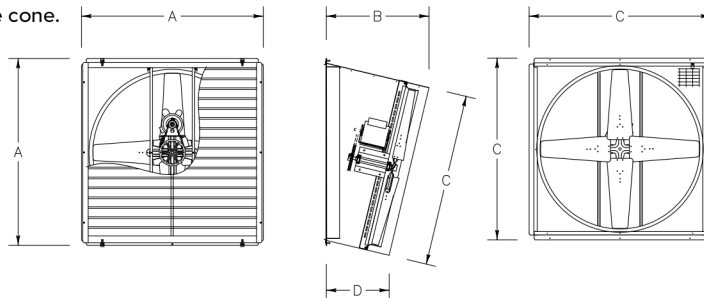

## DISCHARGE CONES

- Increases airflow without increasing horsepower
- Galvanized construction
- Must be ordered with fan
- Field assembly required, assembly hardware and wire guard included

Model	Size	Weight
PFC 36	36"	48
PFC 48	48"	63

