




DIRECT DRIVE SLW

- Rugged heavy gauge galvanized housing, frame and blade
- Galvanized welded bird screen on both front and back
- Rolled inlet venturi for efficient air flow
- Totally enclosed motors

Diameter	Model	Volts	HP	Amps	RPM	0.00" SP		0.05" SP		0.10" SP		Approximate Weight
						CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt	
36"	SLW 3613 D	230/1	1/2	3.0	852	10,220	16.8	9,410	14.6	8,420	13.1	187
48"	SLW 4815 D	230/1	1	4.6	827	18,600	18.3	17,000	15.7	15,400	13.4	237
48"	SLW 4815 D-460	230/460/3	1	5.2/2.6	827	18,600	18.3	17,000	15.7	15,400	13.4	237

*Performance data includes the effect of a shutter and discharge cone.

Dimensions					
Diameter	A	B	C	D	E
36"	42"	30"	40 1/2"	20 1/2"	40 1/2"
48"	54"	32"	52 1/2"	19 1/2"	52 1/2"

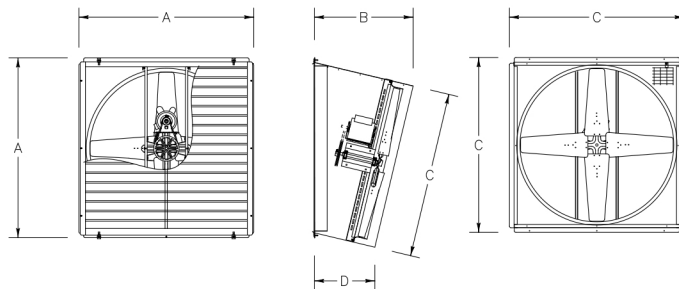

DISCHARGE CONES

- Increases airflow without increasing horsepower
- Galvanized construction
- Must be ordered with fan
- Field assembly required, assembly hardware and wire guard included

Model	Size	Weight
PFC 36	36"	48
PFC 48	48"	63

