



BELT DRIVE SLW

- Rugged heavy gauge galvanized housing, frame and blade
- Galvanized welded bird screen on both front and back
- Rolled Inlet Venturi for efficient air flow
- Totally Enclosed motors


FOUR BLADE MODELS

Diameter	Model	Volts	HP	Amps	RPM	0.00" SP		0.05" SP		0.10" SP		Approximate Weight
						CFM	CFM/ Watt	CFM	CFM/ Watt	CFM	CFM/ Watt	
36"	SLW 3613	230/1	1/2	3.8	550	10,718	16.9	9,952	14.9	9,022	13.1	195
42"	SLW 4213	230/1	1/2	3.8	499	13,058	20.4	12,323	18.2	11,358	16.0	214
48"	SLW 4815	230/1	1	5.5	475	20,089	19.0	18,959	17.6	17,473	15.8	260

SIX BLADE MODELS

Diameter	Model	Volts	HP	Amps	RPM	0.00" SP		0.05" SP		0.10" SP		Approximate Weight
						CFM	CFM/ Watt	CFM	CFM/ Watt	CFM	CFM/ Watt	
36"	SLW 36136	230/1	1/2	3.8	550	11,340	16.9	10,973	15.3	10,507	14.0	212
42"	SLW 42136	230/1	1/2	3.8	499	14,018	20.9	12,653	18.5	12,000	15.9	235
48"	SLW 48156	230/1	1	5.5	475	20,477	22.6	19,396	20.2	18,331	18.5	272

*Performance data includes the effects of a shutter and discharge cone.

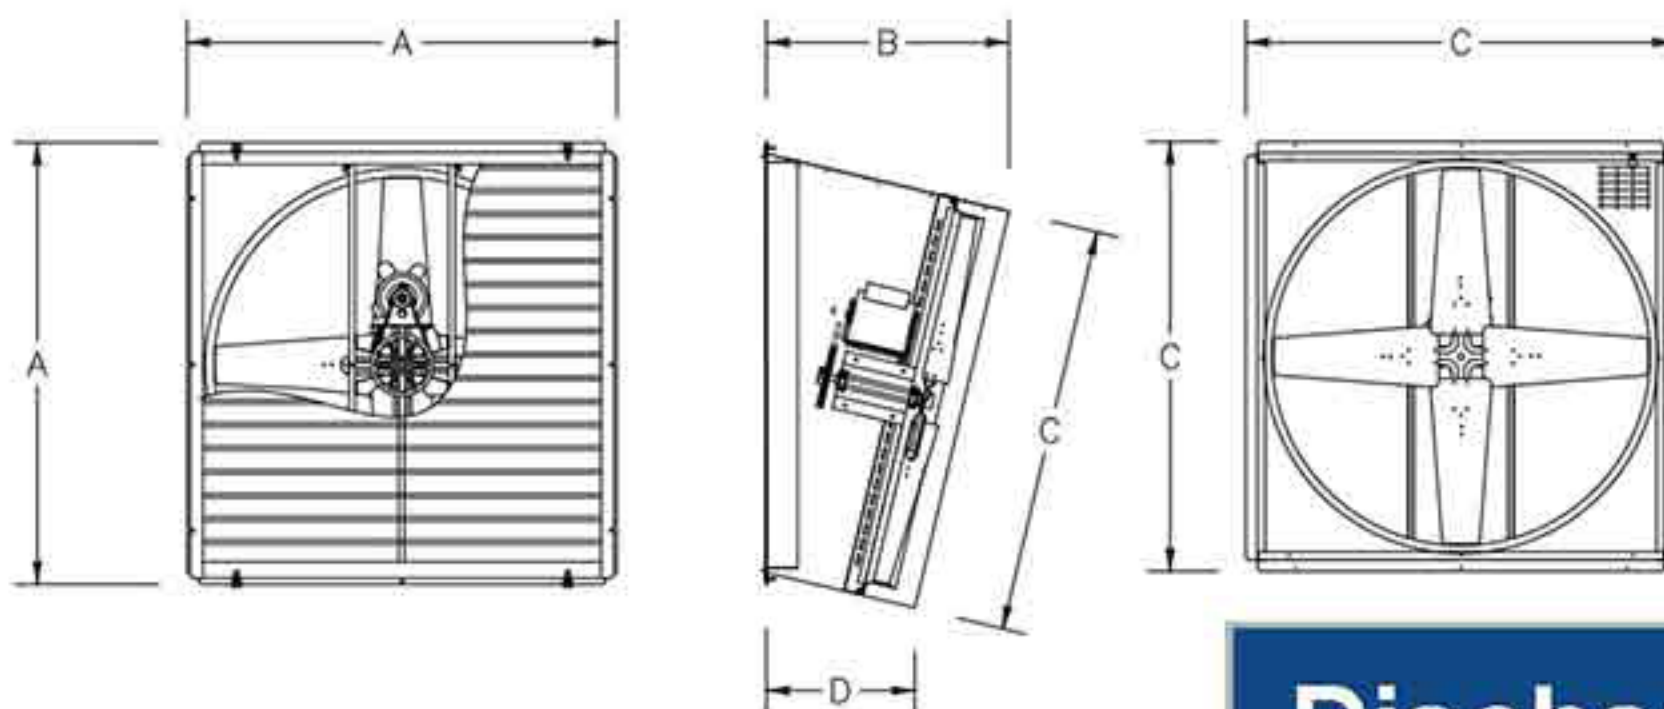

DIMENSIONS

Diameter	A	B	C	D	E
36"	42.00	30.00	40.50	20.50	40.50
42"	48.00	31.00	46.50	20.00	46.50
48"	54.00	32.00	52.50	19.50	52.50

Discharge Cones

- Increases airflow without increasing horsepower
- Galvanized Construction
- Must be ordered with fan
- Field assembly required, assembly hardware and wire guard included



Model	Size	Weight
PFC 36	36"	48
PFC 48	48"	63

AGRICULTURAL FANS: BELT DRIVE SLW

Triangle Engineering Inc. 1-501-982-7558 1101 North Redmond Rd, Jacksonville, AR 72076 www.trianglefans.com