




DIRECT DRIVE SLW

- Rugged heavy gauge galvanized housing, frame and blade
- Galvanized welded bird screen on both front and back
- Rolled Inlet Venturi for efficient air flow
- Totally Enclosed motors

Diameter	Model	Volts	HP	Amps	RPM	0.00" SP		0.05" SP		0.10" SP		Approximate Weight
						CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt	
36"	SLW 3613 D	230/1	1/2	3.0	852	10,220	16.8	9,410	14.6	8,420	13.1	187
42"	SLW 4213 D	230/1	1/2	3.0	810	12,210	18.5	10,680	15.4	9,170	12.3	196
48"	SLW 4815 D	230/1	1	4.6	827	18,600	18.3	17,000	15.7	15,400	13.4	237
48"	SLW 4815 D-460	230/460/3	1	2.6	827	18,600	18.3	17,000	15.7	15,400	13.4	237

*Performance data includes the effects of a shutter and discharge cone.

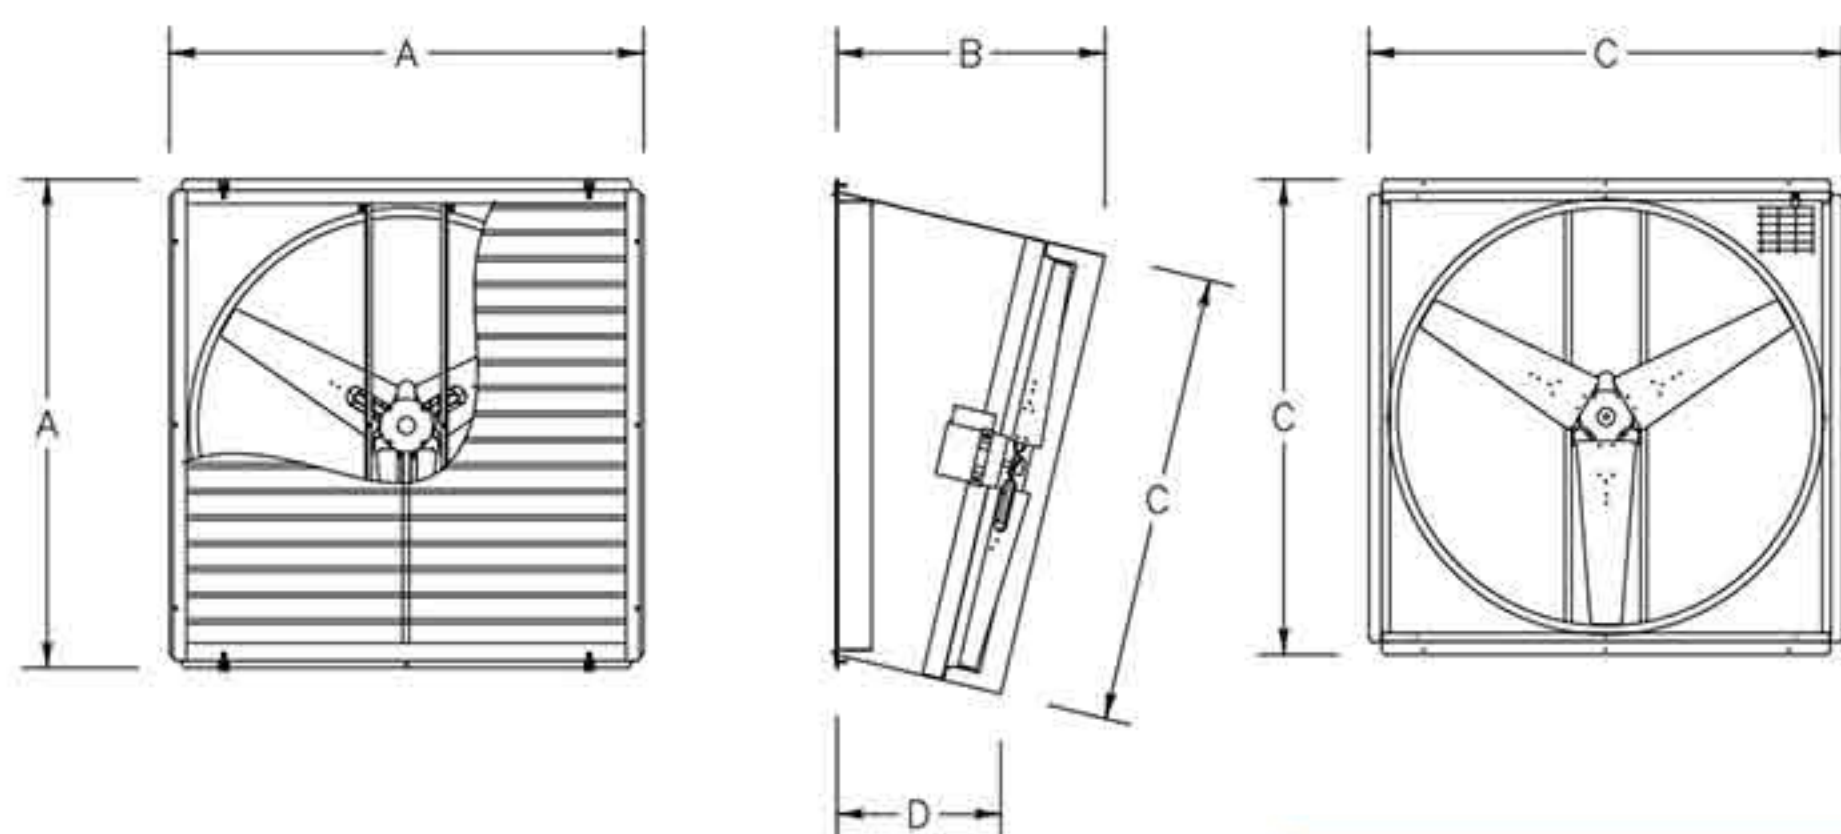

DIMENSIONS

Diameter	A	B	C	D	E
36"	42.00	30.00	40.50	20.50	40.50
42"	48.00	31.00	46.50	20.00	46.50
48"	54.00	32.00	52.50	19.50	52.50

Discharge Cones

- Increases airflow without increasing horsepower
- Galvanized Construction
- Must be ordered with fan
- Field assembly required, assembly hardware and wire guard included



Model	Size	Weight
PFC 36	36"	48
PFC 48	48"	63

AGRICULTURAL FANS: DIRECT DRIVE SLW

Triangle Engineering Inc. 1-501-982-7558 1101 North Redmond Rd, Jacksonville, AR 72076 www.trianglefans.com