



3320 Series Commercial Fan Forced Wall Heater

Data Sheet

General Characteristics 3320 Series Commercial Fan Forced Wall Heater

Disconnect switch.
Automatic fan delay circuit.
Automatic reset thermal limit.
Powder coated 18 gauge steel grill with extruded Aluminum front frame.
Steel block fin element.
Vane axial fan blade: 600 RPM motor; 175 CFM.
Rough-in dimensions: 14 1/8" Wide x 19 1/2" High x 4" Deep.
Grill dimensions: 15 29/32" Wide x 20 27/32" High.
Built-In tamper proof thermostat.
Made in U.S.A.

Heavy-Duty Forced Air wall heaters, where specified. The heaters shall be constructed of a heavy 18 gauge steel housing with an extruded Aluminum frame. The rough-in dimensions are 14 1/8" Wide x 19 1/2" High x 4" Deep. The units shall be available in ratings from 750 to 4800 Watts at 240, 208, and 277 Volts. The heaters shall have a low-speed 600 RPM, 4-pole motor which drives a vane axial blower to deliver a quiet 175 CFM of down flow air. The heating element shall be of the sealed tubular type with large, parallel steel fins for quick heat transfer. Unit shall have as a standard, a thermal overload cut-off for added safety, fan delay switch and built-in tamper proof thermostat which shall be calibrated to provide a range of 0°F. to 110°F. and manual disconnect switch. Optional accessories shall include a surface and semi-recess mounting adapter. All heaters shall be listed by ETL. The heating element shall be supplied with a manufacturer's 1-year limited warranty.

Product Applications 3320 Series Commercial Fan Forced Wall Heater

Heavy-Duty Forced Air wall heaters.

Warranties 3320 Series Commercial Fan Forced Wall Heater

Manufacturer's Limited Warranty: 1 Year.





3320 Series Commercial Fan Forced Wall Heater

Data Sheet

Specific Characteristics 3320 Series Commercial Fan Forced Wall Heater										
Item #	KW	BTU's	Volts	PH	Amps	CFM	RPM	Thermostat	Weight and Dimensions with Packaging (CM)	
									Lbs	W, H, D
USKLO-001	750	2560	120	1	6.25	175	600	Single Pole	26	38,50,11
USKLO-002	1000	3413	120	1	8.3	175	600	Single Pole	26	38,50,11
USKLO-003	1500	5120	120	1	12.5	175	600	Single Pole	26	38,50,11
USKLO-004	4000	13649	208	1	19.2	175	600	Single Pole	26	38,50,11
USKLO-005	4800	16378	208	1	23	175	600	Single Pole	26	38,50,11
USKLO-006	1500 / 1125	5120 / 3840	240 / 208	1	6.2 / 5.4	175	600	Single Pole	26	38,50,11
USKLO-007	2000 / 1500	6824 / 5120	240 / 208	1	8.3 / 7.2	175	600	Single Pole	27	38,50,11
USKLO-008	3000 / 2250	10236 / 7677	240 / 208	1	12.5 / 10.8	175	600	Single Pole	29	38,50,11
USKLO-009	4000 / 3000	13649 / 7677	240 / 208	1	16.7 / 14.4	175	600	Single Pole	29	38,50,11
USKLO-010	4800	16378	240	1	20	175	600	Single Pole	29	38,50,11
USKLO-011	1500	5120	277	1	4.1	175	600	Single Pole	26	38,50,11
USKLO-012	2000	6824	277	1	7.2	175	600	Single Pole	27	38,50,11
USKLO-013	3000	7677	277	1	10.8	175	600	Single Pole	29	38,50,11
USKLO-014	4000	13649	277	1	14.4	175	600	Single Pole	29	38,50,11
USKLO-015	4800	16378	277	1	17.3	175	600	Single Pole	29	38,50,11
USKLO-001	750	2560	120	1	6.25	175	600	Double Pole	26	38,50,11
USKLO-002	1000	3413	120	1	8.3	175	600	Double Pole	26	38,50,11
USKLO-003	1500	5120	120	1	12.5	175	600	Double Pole	26	38,50,11
USKLO-004	4000	13649	208	1	19.2	175	600	Double Pole	26	38,50,11
USKLO-005	4800	16378	208	1	23	175	600	Double Pole	26	38,50,11
USKLO-006	1500 / 1125	5120 / 3840	240 / 208	1	6.2 / 5.4	175	600	Double Pole	26	38,50,11
USKLO-007	2000 / 1500	6824 / 5120	240 / 208	1	8.3 / 7.2	175	600	Double Pole	27	38,50,11
USKLO-008	3000 / 2250	10236 / 7677	240 / 208	1	12.5 / 10.8	175	600	Double Pole	29	38,50,11
USKLO-009	4000 / 3000	13649 / 7677	240 / 208	1	16.7 / 14.4	175	600	Double Pole	29	38,50,11
USKLO-010	4800	16378	240	1	20	175	600	Double Pole	29	38,50,11
USKLO-011	1500	5120	277	1	4.1	175	600	Double Pole	26	38,50,11
USKLO-012	2000	6824	277	1	7.2	175	600	Double Pole	27	38,50,11
USKLO-013	3000	7677	277	1	10.8	175	600	Double Pole	29	38,50,11
USKLO-014	4000	13649	277	1	14.4	175	600	Double Pole	29	38,50,11
USKLO-015	4800	16378	277	1	17.3	175	600	Double Pole	29	38,50,11




3320 Series Commercial Fan Forced Wall Heater

Data Sheet

Dimensions (in) 3320 Series Commercial Fan Forced Wall Heater




Item #	A	B	C
USKLO-001 a USKLO-009	15	20	4

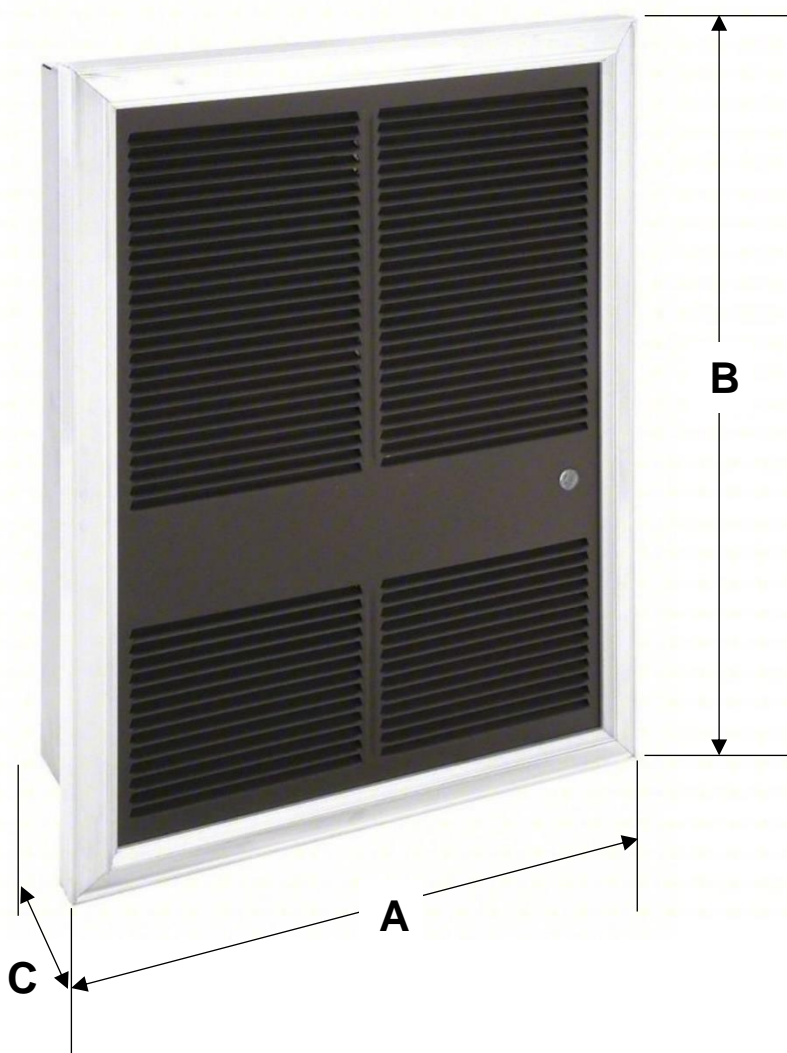



3320 Series Commercial Fan Forced Wall Heater

Data Sheet

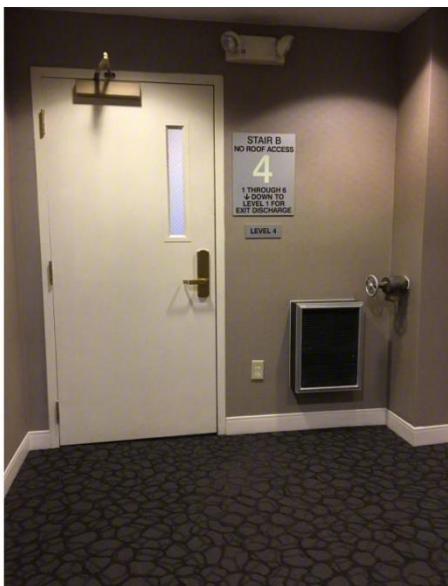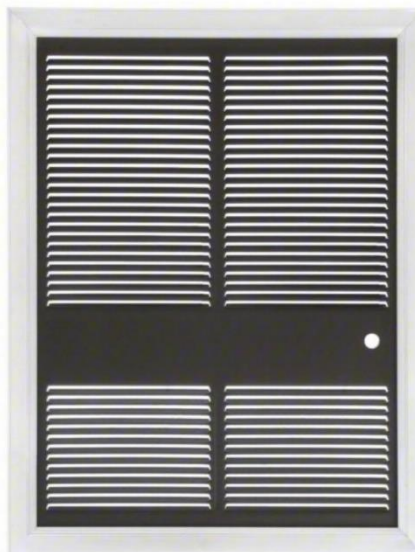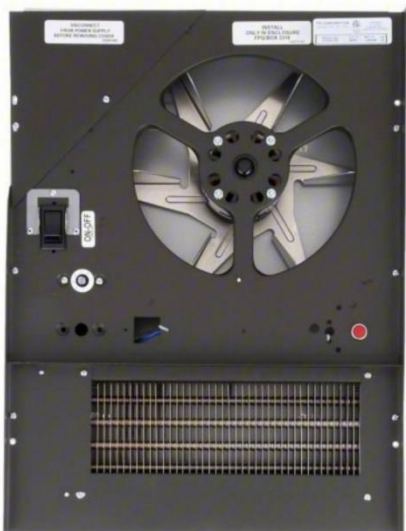

ID	Author	Description Error	Description Update	Supervisor Name
V1	Angelica Romero	New Data Sheet	New Data Sheet	Jessica Lorenzo