




General Characteristics of CVX Series Radiant Ceiling Heaters

The CVX Series is an indoor ceiling heater used for residential, commercial and industrial use. Provides both focused infrared rays and downward directional heating above windows, glass walls or mirrors in bathrooms. The saw-tooth surface increases radiating surface area by 45%. High temperature white powder coat finish on .096 thick aluminum. The element is made of Nichrome wire, embedded in Magnesium Oxide powder and enclosed and sealed in an extruded aluminum reflector. Wall mounting brackets included, ceiling brackets available on request. Dimensions: 3 1/8" deep x 4 1/8" high. Available Watts: From 450- 1250 Watts. Available Volts: From 120, 208, 240 and 277 Volts. Suggested mounting dimensions: 3 1/2" below ceiling and 6Ft min above finished floor. The CVX Series is ETL-CETL listed. Comes in two series the Standard (60Hz) and the International (50Hz). International Series has a thicker element this along with the Hertz is the only difference between the standard and international series. Options: Ceiling mounts available on purchase. Accessories: Aerosol Touch up Paint, 42" blank section (no heater), 60" blank section (no heater) and 84" blank section (no heater). All accessories are quoted separately. Note: order 2 for units up to 72", order 3 for units above 72" Made in the U.S.A.

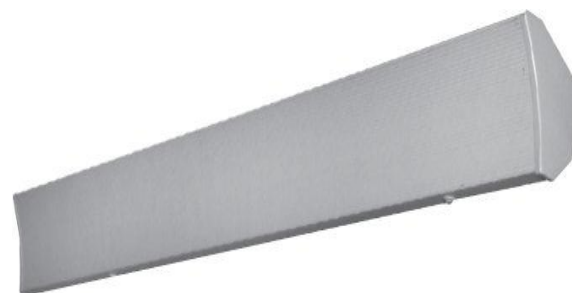

Product Applications of CVX Series Radiant Ceiling Heaters

For Residential, Industrial and Commercial use, downward directional heating and focused heating.
 For Indoor Use

Warranty of CVX Series Radiant Ceiling Heaters

Manufacturer's Warranty: 1 year.

Specific Characteristics of CVX Series Radiant Ceiling Heaters

Item #	Manufacturing #	Watts W	BTU's	Amperes A	Volts V	Hertz Hz	Mounting Options	Weight and Dimensions with Packaging	
								Lbs.	L,W,H In.
USCVH-001	CV4512X	450	1536	4	120	60	Wall Mounting	7	5,44,6
USCVH-002	CV4512X + CVCBX	450	1536	4	120	60	Ceiling Mounting	7½	5,44,6
USCVH-003	CV45X	450	1536	2	240	60	Wall Mounting	7	5,44,6
USCVH-004	CV45X + CVCBX	450	1536	2	240	60	Ceiling Mounting	7½	5,44,6
USCVH-005	CV45YX	450	1536	2	208	60	Wall Mounting	7	5,44,6
USCVH-006	CV45YX + CVCBX	450	1536	2	208	60	Ceiling Mounting	7½	5,44,6
USCVH-007	CV4527X	450	1536	2	277	60	Wall Mounting	7	5,44,6
USCVH-008	CV4527X + CVCBX	450	1536	2	277	60	Ceiling Mounting	7½	5,44,6
USCVH-009	CV6012X	600	2048	5	120	60	Wall Mounting	10	5,62,6



CVX Series
Radiant Cove Ceiling Heater
 Data Sheet


Item #	Manufacturing #	Watts W	BTU's	Amperes A	Volts V	Hertz Hz	Mounting Options	Weight and Dimensions with Packaging	
								Lbs.	L,W,H In.
USCVH-010	CV6012X +CVCBX	600	2048	5	120	60	Ceiling Mounting	10½	5,62,6
USCVH-011	CV60X	600	2048	3	120	60	Wall Mounting	10	5,62,6
USCVH-012	CV60X +CVCBX	600	2048	3	120	60	Ceiling Mounting	10½	5,62,6
USCVH-013	CV60YX	600	2048	3	208	60	Wall Mounting	10	5,62,6
USCVH-014	CV60YX + CVCBX	600	2048	3	208	60	Ceiling Mounting	10½	5,62,6
USCVH-015	CV6027X	600	2048	2	277	60	Wall Mounting	10	5,62,6
USCVH-016	CV6027X +CVCBX	600	2048	2	277	60	Ceiling Mounting	10½	5,62,6
USCVH-017	CV7512X	750	2560	6	120	60	Wall Mounting	13	5,74,6
USCVH-018	CV7512X +CVCBX	750	2560	6	120	60	Ceiling Mounting	13½	5,74,6
USCVH-019	CV75X	750	2560	3	240	60	Wall Mounting	13	5,74,6
USCVH-020	CV75X +CVCBX	750	2560	3	240	60	Ceiling Mounting	13½	5,74,6
USCVH-021	CV75YX	750	2560	3.6	208	60	Wall Mounting	13	5,74,6
USCVH-022	CV75YX + CVCBX	750	2560	3.6	208	60	Ceiling Mounting	13½	5,74,6
USCVH-023	CV7527X	750	2560	3	277	60	Wall Mounting	13	5,74,6
USCVH-024	CV7527X + CVCBX	750	2560	3	277	60	Ceiling Mounting	13½	5,74,6
USCVH-025	CV9012X	900	3072	8	120	60	Wall Mounting	14	5,86,6
USCVH-026	CV9012X + CVCBX	900	3072	8	120	60	Ceiling Mounting	14½	5,86,6
USCVH-027	CV90X	900	3072	4	120	60	Wall Mounting	14	5,86,6
USCVH-028	CV90X + CVCBX	900	3072	4	120	60	Ceiling Mounting	14½	5,86,6
USCVH-029	CV90YX	900	3072	4	208	60	Wall Mounting	14	5,86,6
USCVH-030	CV90YX + CVCBX	900	3072	4	208	60	Ceiling Mounting	14½	5,86,6
USCVH-031	CV9027X	900	3072	3	277	60	Wall Mounting	14	5,86,6
USCVH-032	CV9027X + CVCBX	900	3072	3	277	60	Ceiling Mounting	14½	5,86,6
USCVH-033	CV10012X	1000	3413	8	120	60	Wall Mounting	17	5,98,6
USCVH-034	CV10012X + CVCBX	1000	3413	8	120	60	Ceiling Mounting	17½	5,98,6
USCVH-035	CV100X	1000	3413	4	240	60	Wall Mounting	17	5,98,6
USCVH-036	CV100X + CVCBX	1000	3413	4	240	60	Ceiling Mounting	17½	5,98,6
USCVH-037	CV100YX	1000	3413	5	208	60	Wall Mounting	17	5,98,6
USCVH-038	CV100YX + CVCBX	1000	3413	5	208	60	Ceiling Mounting	17½	5,98,6
USCVH-039	CV10027X	1000	3413	4	277	60	Wall Mounting	17	5,98,6
USCVH-040	CV10027X + CVCBX	1000	3413	4	277	60	Ceiling Mounting	17½	5,98,6
USCVH-041	CV11012X	1100	3754	9	120	60	Wall Mounting	19	5,110,6
USCVH-042	CV11012X + CVCBX	1100	3754	9	120	60	Ceiling Mounting	19½	5,110,6
USCVH-043	CV110X	1100	3754	5	240	60	Wall Mounting	19	5,110,6
USCVH-044	CV110X + CVCBX	1100	3754	5	240	60	Ceiling Mounting	19½	5,110,6
USCVH-045	CV110YX	1100	3754	5	208	60	Wall Mounting	19	5,110,6
USCVH-046	CV110YX + CVCBX	1100	3754	5	208	60	Ceiling Mounting	19½	5,110,6
USCVH-047	CV11027X	1100	3754	4	277	60	Wall Mounting	19	5,110,6
USCVH-048	CV11027X + CVCBX	1100	3754	4	277	60	Ceiling Mounting	19½	5,110,6
USCVH-049	CV12512X	1250	4266	10	120	60	Wall Mounting	21	5,122,6
USCVH-050	CV12512X + CVCBX	1250	4266	10	120	60	Ceiling Mounting	21½	5,122,6
USCVH-051	CV125X	1250	4266	5	240	60	Wall Mounting	21	5,122,6
USCVH-052	CV125X + CVCBX	1250	4266	5	240	60	Ceiling Mounting	21½	5,122,6
USCVH-053	CV125YX	1250	4266	6	208	60	Wall Mounting	21	5,122,6
USCVH-054	CV125YX + CVCBX	1250	4266	6	208	60	Ceiling Mounting	21½	5,122,6





Item #	Manufacturing #	Watts W	BTU's	Amperes A	Volts V	Hertz Hz	Mounting Options	Weight and Dimensions with Packaging	
								Lbs.	L,W,H In.
USCVH-055	CV12527X	1250	4266	5	277	60	Wall Mounting	21	5,122,6
USCVH-056	CV12527X + CVCBX	1250	4266	5	277	60	Ceiling Mounting	21½	5,122,6

Dimensions (In.) of CVX Series Radiant Ceiling Heaters

Series	Length A	Width B	Height C
USCVH-001 to 008	3 1/8"	42"	4 1/8"
USCVH-009 to 016	3 1/8"	60"	4 1/8"
USCVH-017 to 024	3 1/8"	72"	4 1/8"
USCVH-025 to 032	3 1/8"	84"	4 1/8"
USCVH-033 to 040	3 1/8"	96"	4 1/8"
USCVH-041 to 048	3 1/8"	108"	4 1/8"
USCVH-049 to 056	3 1/8"	120"	4 1/8"

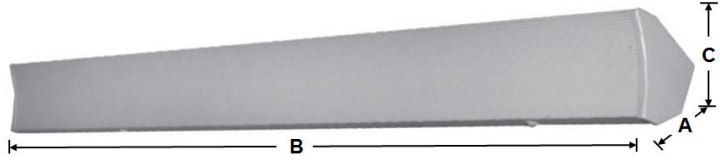

Mounting Specifications of CVX Series Radiant Ceiling Heaters

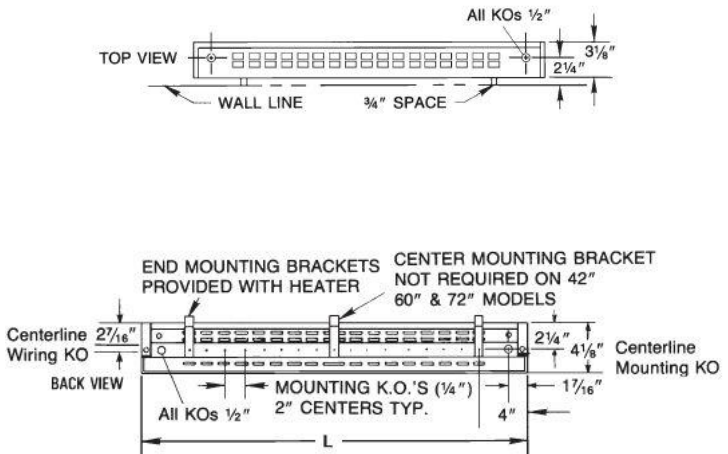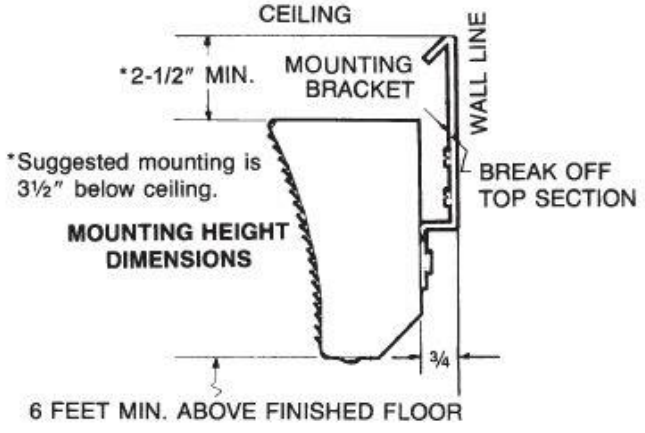



Short Description of CVX Series Radiant Ceiling Heaters

Item #	Manufacturing #	Short Description 70 Characters Maximum									
		012345678901234567890123456789012345678901234567890123456789									
USCVH-001	CV4512X	450W, 1536 BTU's, 4A, 120V, 60Hz, Wall Mount.									

SEO Table of CVX Series Radiant Ceiling Heaters

Title
TPI CVX Series Radiant Ceiling Heaters.
Meta Description
TPI CVX Series Radiant Ceiling Heaters for Industrial Use, TPI CVX Series Radiant Ceiling Heaters Commercial Use, TPI CVX Series Radiant Ceiling Heaters for Residential Use, TPI CVX Series Radiant Ceiling Heaters for Indoor Use, TPI CVX Series Radiant Ceiling Heaters for Heating Use, TPI CVX Series Radiant Ceiling Heaters for Focused Heating Use.
Meta Key Words
TPI CVX Series Radiant Ceiling Heaters for Industrial Use, TPI CVX Series Radiant Ceiling Heaters Commercial Use, TPI CVX Series Radiant Ceiling Heaters for Residential Use, TPI CVX Series Radiant Ceiling Heaters for Indoor Use, TPI CVX Series Radiant Ceiling Heaters for Heating Use, TPI CVX Series Radiant Ceiling Heaters for Focused Heating Use.
Meta URL (file name)
Tpi-cvx-series-radiant-ceiling-heaters-us-english.htm

Product Line Description of CVX Series Radiant Ceiling Heaters

```

<FONT Size=1>
<b>Product Description:</b> TPI CVX Series Radiant Ceiling Heaters<br>
<b>Weather Rating:</b> Indoor<br>
<b>Wattage:</b> 450 to 1250W<br>
<b>BTU's:</b> 1536 to 4266<br>
<b>Amperes:</b> 2 to 10A<br>
<b>Voltage:</b> 120, 208, 240 & 277V<br>
<b>Hertz:</b> 60Hz<br>
<b>Mounting Options:</b> Wall or Ceiling Mounted<br>
<b>Product Type:</b> TPI CVX Series Radiant Ceiling Heaters<br>
<b>Usual Delivery Time or Lead Time:</b> 1 to 2 weeks<br>
</FONT>
    
```